




Hatchery doors

Dedicated doors for various areas in the hatchery

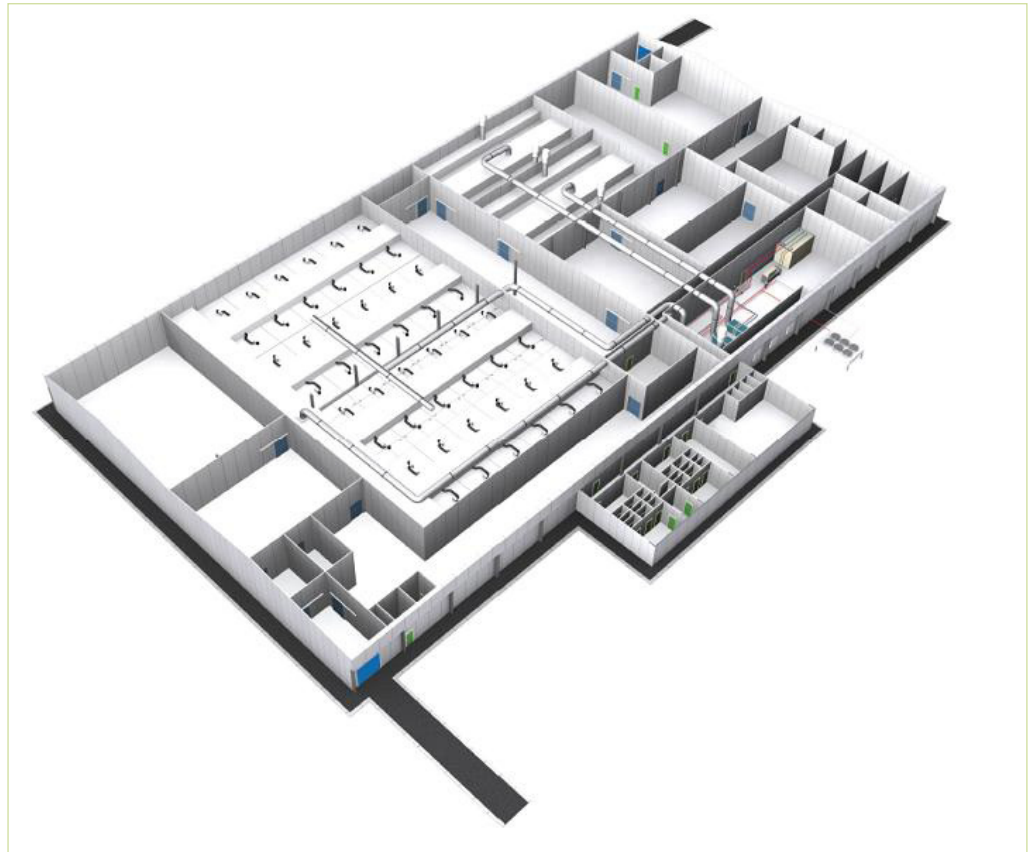

Features and benefits

- Complete range of doors for different areas in the hatchery
- Designed for long lasting operation
- Dedicated models for specific applications
- Ergonomic design
- Easy to clean

One of the most important elements of the infrastructure of a hatchery is the different types of doors. Firstly, special doors are needed for various areas in the hatchery, such as the fumigation room and the cold store. Secondly, doors are subject to intensive and rough handling, and thus need to be robust, yet easy to handle and maintain. They should not obstruct critical passages and should be easy to open. Finally, they need to be frequently cleaned as part of the total hygiene and bio-security aspects of the hatchery.

Petersime has an extensive experience in the design of complete hatcheries and knows exactly what doors offer the best solutions to your needs.

Product range

Petersime offers a complete range of industrial doors for hatcheries.

The product range includes:

- Insulated sliding doors
- Isothermal swing doors
- Standard hatchery doors

Each door is available in 4 configurations:

- Right opening door
 - 80 mm wall panel thickness
 - 100 mm wall panel thickness
- Left opening door
 - 80 mm wall panel thickness
 - 100 mm wall panel thickness

Models



Insulated sliding doors

- Ideally suitable for setter, hatcher and process rooms
- Does not obstruct passage in the hallways
- Available in different height and width versions
- Soft sliding mechanism
- Dimensions:
 - Doorway of 1250 mm x 2200 mm x 60 mm (w x h x d)
 - Doorway of 1400 mm x 2200 mm x 60 mm (w x h x d)
 - Doorway of 1550 mm x 2200 mm x 60 mm (w x h x d)
 - Doorway of 2030 mm x 2200 mm x 60 mm (w x h x d)



Isothermal swing doors

- Recommended for fumigation rooms and small egg holding rooms
- Thermal insulated construction
- Two solid hinges per door
- Door can be locked
- Dimensions:
Doorway of 1400 mm x 2200 mm x 60 mm (w x h x d)



Standard hatchery doors

- Recommended for the process, office and sanitary areas
- Insulated with 40 mm polyurethane foam
- Three solid hinges per door
- Can be locked with one cylinder lock
- Single door dimensions:
 - Doorway of 620 mm x 1985 mm x 40 mm (w x h x d)
 - Doorway of 770 mm x 1985 mm x 40 mm (w x h x d)
 - Doorway of 920 mm x 1985 mm x 40 mm (w x h x d)
 - Doorway of 920 mm x 2185 mm x 40 mm (w x h x d)
 - Doorway of 1120 mm x 2185 mm x 40 mm (w x h x d)
- Dual door dimensions:
 - Doorway of 1520 mm x 2185 mm x 40 mm (w x h x d)
 - Doorway of 2000 mm x 2185 mm x 40 mm (w x h x d)



Contact us now and
start maximizing your profits

WHEN[®]
CHICKS
COUNT

All photographs, measurements and descriptions are provided without engagement.
We reserve the right to make modifications at any time. Date of issue: 09/2014

Petersime nv - Centrumstraat 125 - 9870 Zulte (Olsene) - Belgium
T +32 (0)9 388 96 11 - F +32 (0)9 388 84 58 - info@petersime.com - www.petersime.com